

# CLIMATIC


7  
R410a



- Turbo mode
- High power saving
- Advanced Technology
- Self Diagnosing System
- Low Noise Level
- Easy Filter Cleaning





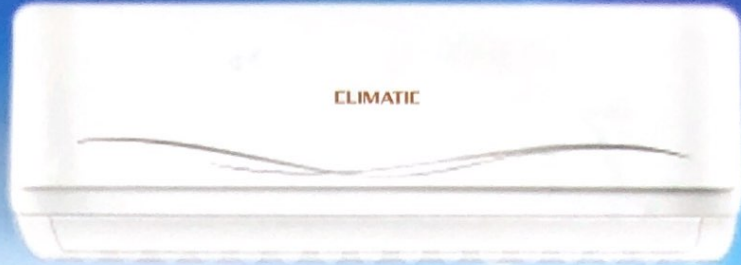

**CLIMATIC**  
QUALITY HOME APPLIANCE

**T3 Wall Type  
Split AC Unit**

**SPECIFICATIONS**

MODEL		CLCS18	CLCS24	CLCS30	CLCS36	
POWER SUPPLY		V-Hz-PH	220-240V/1PH/50 Hz			
COOLING	CAPACITY	BTU/h - TR	18220 (1.5TR)	22960 (2.0TR)	27920 (2.5TR)	31140 (3.0TR)
	INPUT	W	1500	1925	2340	2600
	RATED CURRENT	A	6.5	8.4	10.2	11.3
	EER	W/W(EER)	3.52 (12.014)	3.5 ( 11.729)	3.51(11.849)	3.49 (11.3)
INDOOR NOISE LEVEL	( LO/MI/HI )	dB(A)	38.5/--/47.0	41.0/--/46.0	39.5/--/49.5	39.5/--/49.5
INDOOR UNIT	DIMENSION (W*D*H)	MM	1080X226X336	1080X226X336	1259X282X362	1259X282X362
	PACKING(W*D*H)	MM	1155X315X415	1340X380X450	1340X380X450	1340X380X450
	NET/GROSS WIGHT	Kg	14.3 / 18.1	14.5 / 18.2	21.8 / 27.5	22.2 / 28.0
OUTDOOR NOISE LEVEL		dB(A)	56	57.5	58.5	62
OUTDOOR UNIT	DIMENSION (W*D*H)	MM	845X363X702	946X410X810		
	PACKING(W*D*H)	MM	965X395X765	1090X500X875		
	NET/GROSS WIGHT	Kg	46.2 / 49.5	61.8 / 67.8	66.3 / 72.1	66.9 / 73.1
REFRIGERANT TYPE / WEIGHT		g	R410a / 1400g	R410a / 2000g	R410a / 2400g	R410a 2500g
REFRIGERANT PIPING	LIQUID SIDE / GAS SIDE	MM(INCH)	φ6.35/φ12.7 (1/4"1/2")	φ9.52/φ15.9 (3/8"5/8")	φ9.52/φ15.9 (3/8"5/8")	φ9.52/φ19.0 (3/8"3/4")
	MAX.REFRIGERANT PIPE LENGTH	M	25 METERS			
	MAX. DIFFERENCE IN LEVEL	M	10 METERS			
ROOM TEMPTRATURE	INDOOR ( COOLING	RANGE	17-32			
	OUTDOOR COOLING	RANGE	18-54			
Above specifications are subject to change without prior notice						
Measured conditions :			Inside 27	Outside 35		

**يَتِيم لَتَكْيِيفِ الْهَوَاءِ ذ.م.م**  
**YATEEM AIRCONDITIONING W.L.L**

*We are the Best as Judged by our Customers*

Tel: 17271122, 17253177 | email: showroom@yateemac.net